

Zener Voltage Regulators

200 mW SOD-323 Surface Mount

**MM3Z2V4T1
SERIES**

ORDERING INFORMATION

Device *	Package	Shipping
MM3ZxxT1	SOD-323	3000/Tape & Reel

DEVICE MARKING INFORMATION

See specific marking information in the device marking column of the Electrical Characteristics table on page 3 of this data sheet.

* The "T1" suffix refers to an 8 mm, 7 inch reel.

This series of Zener diodes is packaged in a SOD-323 surface mount package that has a power dissipation of 200 mW. They are designed to provide voltage regulation protection and are especially attractive in situations where space is at a premium. They are well suited for applications such as cellular phones, hand held portables, and high density PC boards.

Specification Features:

- Standard Zener Breakdown Voltage Range – 2.4 V to 75 V
- Steady State Power Rating of 200 mW
- Small Body Outline Dimensions:
0.067, x 0.049, (1.7 mm x 1.25 mm)
- Low Body Height: 0.035, (0.9 mm)
- Package Weight: 4.507 mg/unit
- ESD Rating of Class 3 (>16 KV) per Human Body Model

Mechanical Characteristics:

CASE: Void-free, transfer-molded plastic

FINISH: All external surfaces are corrosion resistant

MAXIMUM CASE TEMPERATURE FOR SOLDERING PURPOSES:

260°C for 10 Seconds

LEADS: Plated with Pb/Sn for ease of solderability

POLARITY: Cathode indicated by polarity band


FLAMMABILITY RATING: UL94 V-0

MOUNTING POSITION: Any

MAXIMUM RATINGS

Rating	Symbol	Max	Unit
Total Device Dissipation FR-5 Board, (Note 1.) @ TA = 25°C	P _D	200	mW
Derate above 25°C		1.5	mW/°C
Thermal Resistance from Junction to Ambient	R _{θJA}	635	°C/W
Junction and Storage Temperature Range	T _J , T _{stg}	-65 to +150	°C

1. FR-4 Minimum Pad




**CASE 477-02, STYLE 1
SOD-323**

MARKING DIAGRAM



xx = Specific Device Code
M = Date Code




1 CATHODE 2 ANODE

MM3Z2V4T1 SERIES

ELECTRICAL CHARACTERISTICS

($T_A = 25^\circ\text{C}$ unless otherwise noted,
 $V_F = 0.9 \text{ V Max. } @ I_F = 10 \text{ mA}$ for all types)

Symbol	Parameter
V_Z	Reverse Zener Voltage @ I_{ZT}
I_{ZT}	Reverse Current
Z_{ZT}	Maximum Zener Impedance @ I_{ZT}
I_{ZK}	Reverse Current
Z_{ZK}	Maximum Zener Impedance @ I_{ZK}
I_R	Reverse Leakage Current @ V_R
V_R	Reverse Voltage
I_F	Forward Current
V_F	Forward Voltage @ I_F
ΘV_Z	Maximum Temperature Coefficient of V_Z
C	Max. Capacitance @ $V_R = 0$ and $f = 1 \text{ MHz}$

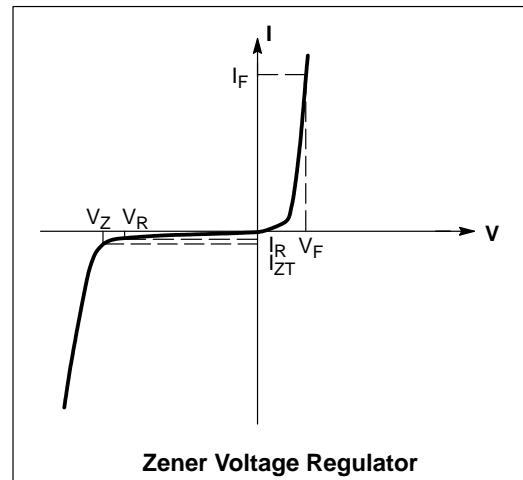

MM3Z2V4T1 SERIES
ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted, $V_F = 0.9 \text{ V Max.}$ @ $I_F = 10 \text{ mA}$ for all types)

Device	Device Marking	Zener Voltage (Note 2.)			Zener Impedance		Leakage Current		ΘV_Z (mV/k) @ I_ZT	C @ $V_R = 0$ $f = 1 \text{ MHz}$	
		V _Z (Volts)		@ I_ZT	Z_{ZT} @ I_ZT	Z_{ZK} @ I_ZK	I_R @ V_R				
		Min	Nom	Max	mA	Ω	mA	μA	Volts	Min	Max
MM3Z2V4T1	00	2.2	2.4	2.6	5	100	1000	0.5	50	1.0	-3.5
MM3Z2V7T1	01	2.5	2.7	2.9	5	100	1000	0.5	20	1.0	-3.5
MM3Z3V0T1	02	2.8	3.0	3.2	5	100	1000	0.5	10	1.0	-3.5
MM3Z3V3T1	05	3.1	3.3	3.5	5	95	1000	0.5	5	1.0	-3.5
MM3Z3V6T1	06	3.4	3.6	3.8	5	90	1000	0.5	5	1.0	-3.5
MM3Z3V9T1	07	3.7	3.9	4.1	5	90	1000	0.5	3	1.0	-3.5
MM3Z4V3T1	08	4.0	4.3	4.6	5	90	1000	0.5	3	1.0	-3.5
MM3Z4V7T1	09	4.4	4.7	5.0	5	80	800	0.5	3	2.0	-3.5
MM3Z5V1T1	0A	4.8	5.1	5.4	5	60	500	0.5	2	2.0	-2.7
MM3Z5V6T1	0C	5.2	5.6	6.0	5	40	200	0.5	1	2.0	-2.0
MM3Z6V2T1	0E	5.8	6.2	6.6	5	10	100	0.5	3	4.0	0.4
MM3Z6V8T1	0F	6.4	6.8	7.2	5	15	160	0.5	2	4.0	1.2
MM3Z7V5T1	0G	7.0	7.5	7.9	5	15	160	0.5	1	5.0	2.5
MM3Z8V2T1	0H	7.7	8.2	8.7	5	15	160	0.5	0.7	5.0	3.2
MM3Z9V1T1	0K	8.5	9.1	9.6	5	15	160	0.5	0.2	7.0	3.8
MM3Z10VT1	0L	9.4	10	10.6	5	20	160	0.5	0.1	8.0	4.5
MM3Z11VT1	0M	10.4	11	11.6	5	20	160	0.5	0.1	8.0	5.4
MM3Z12VT1	0N	11.4	12	12.7	5	25	80	0.5	0.1	8.0	6.0
MM3Z13VT1	0P	12.4	13.25	14.1	5	30	80	0.5	0.1	8.0	7.0
MM3Z15VT1	0T	14.3	15	15.8	5	30	80	0.5	0.05	10.5	9.2
MM3Z16VT1	0U	15.3	16.2	17.1	5	40	80	0.5	0.05	11.2	10.4
MM3Z18VT1	0W	16.8	18	19.1	5	45	80	0.5	0.05	12.6	12.4
MM3Z20VT1	0Z	18.8	20	21.2	5	55	100	0.5	0.05	14.0	14.4
MM3Z22VT1	10	20.8	22	23.3	5	55	100	0.5	0.05	15.4	16.4
MM3Z24VT1	11	22.8	24.2	25.6	5	70	120	0.5	0.05	16.8	18.4
MM3Z27VT1	12	25.1	27	28.9	2	80	300	0.5	0.05	18.9	21.4
MM3Z30VT1	14	28	30	32	2	80	300	0.5	0.05	21.0	24.4
MM3Z33VT1	18	31	33	35	2	80	300	0.5	0.05	23.2	27.4
MM3Z36VT1	19	34	36	38	2	90	500	0.5	0.05	25.2	30.4
MM3Z39VT1	20	37	39	41	2	130	500	0.5	0.05	27.3	33.4
MM3Z43VT1	21	40	43	46	2	150	500	0.5	0.05	30.1	37.6
MM3Z47VT1	1A	44	47	50	2	170	500	0.5	0.05	32.9	42.0
MM3Z51VT1	1C	48	51	54	2	180	500	0.5	0.05	35.7	46.6
MM3Z56VT1	1D	52	56	60	2	200	500	0.5	0.05	39.2	52.2
MM3Z62VT1	1E	58	62	66	2	215	500	0.5	0.05	43.4	58.8
MM3Z68VT1	1F	64	68	72	2	240	500	0.5	0.05	47.6	65.6
MM3Z75VT1	1G	70	75	79	2	255	500	0.5	0.05	52.5	73.4

2. Zener voltage is measured with a pulse test current I_Z at an ambient temperature of 25°C .

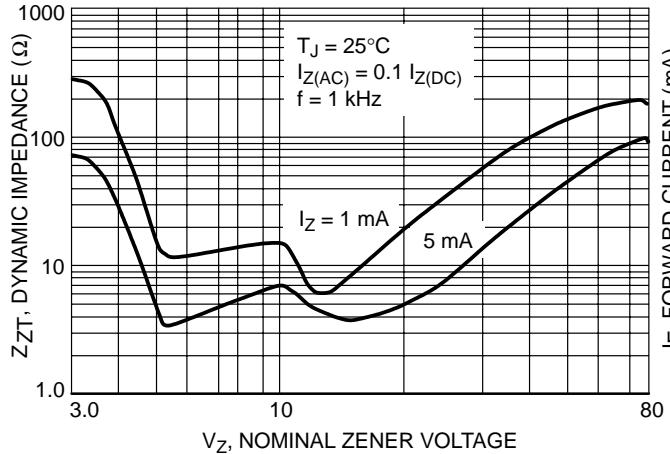
MM3Z2V4T1 SERIES
Typical Characteristics


Figure 1. Effect of Zener Voltage on Zener Impedance

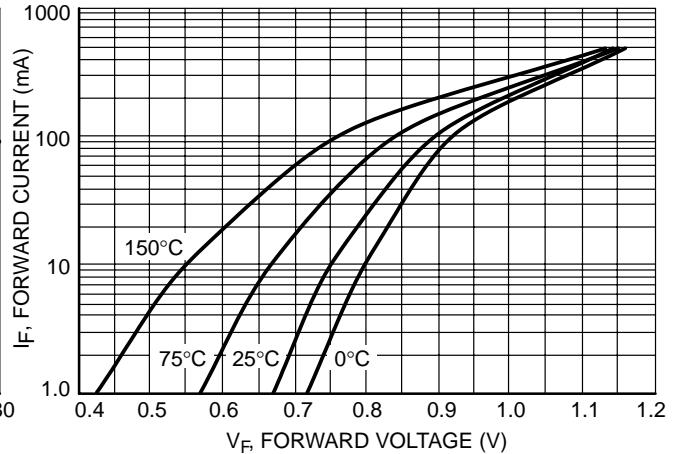


Figure 2. Typical Forward Voltage

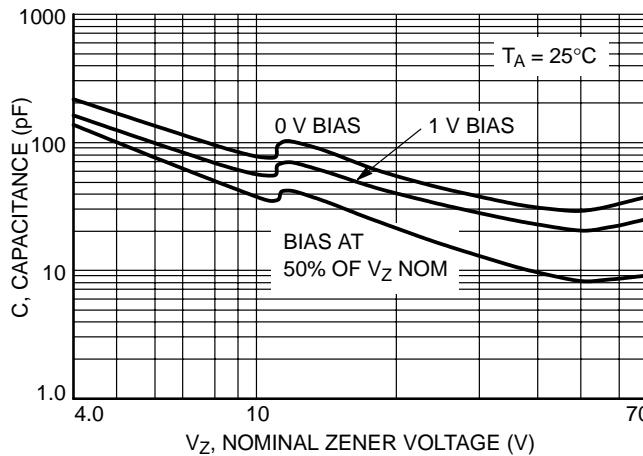


Figure 3. Typical Capacitance


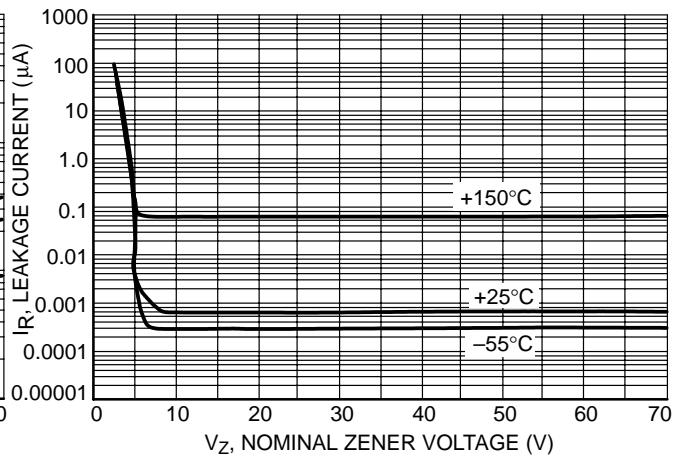



Figure 4. Typical Leakage Current

MM3Z2V4T1 SERIES

Typical Characteristics

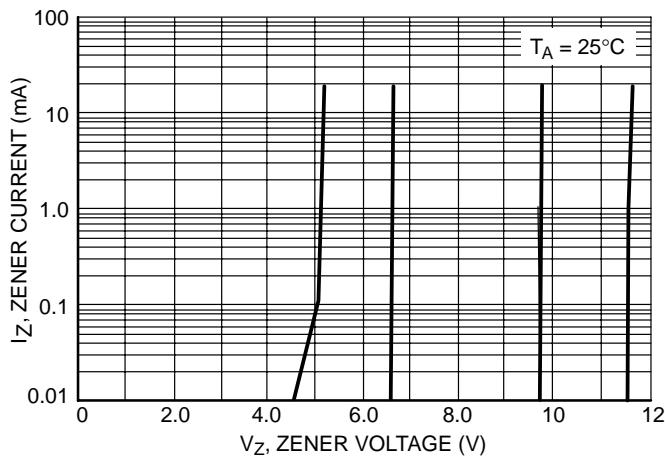

**Figure 5. Zener Voltage versus Zener Current
(V_Z Up to 12 V)**

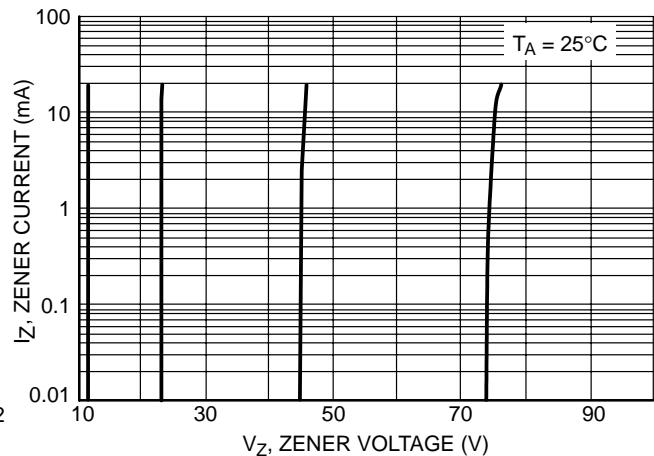

**Figure 6. Zener Voltage versus Zener Current
(12 V to 75 V)**

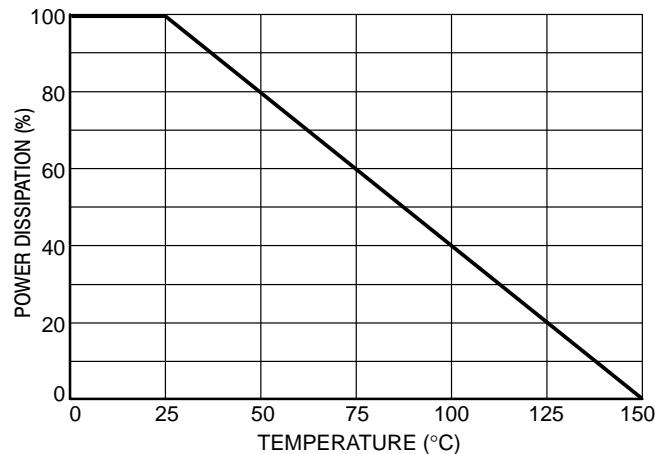


Figure 7. Steady State Power Derating